



hyperstone[®] AG
hyNet 32S
0405FK1HH
S27124.1

IEEE 1588
EtherNet/IP
ETHERNET POWERLINK
PROFINET
HYNETOS
Linux

hyNet 32S

RISC/DSP Microprocessor



Hyperstone AG
Line-Eid-Strasse 3
78467 Konstanz
Germany
Phone: +49 7531 98030
Fax: +49 7531 51725
Email: info@hyperstone.de

Hyperstone Inc. - USA
4800 Bethania Station Road
Winston-Salem, NC 27105
USA
Phone: +1 336 744 0724
Fax: +1 336 744 5054
Email: us.sales@hyperstone.com

Hyperstone Taiwan
11F, No. 183, Sec.2, TidingBlvd.
Neihu District, Taipei City 114
Taiwan, R.O.C.
Phone: +886 2 8751 0203
Fax: +886 2 8797 2321
Email: taiwan@hyperstone.com

www.hyperstone.com

Content is subject to change without prior notice. hyNet, hyNet 32XS, hyRTK and hyDSP are trademarks of Hyperstone AG. Other brand, product or company names are property of the respective holder. Warranties, implied or expressed as well as liabilities for any damage resulting from using provided information in this document are excluded until part of a separate written contract.

HS-Mkt-AM-06-01-01



hyNet 32S

RISC/DSP Microprocessor



Benefit from both, the unique, highly efficient and easy to program Hyperstone RISC / DSP architecture combined with most necessary interfaces and features required for network enabling and communications within the embedded applications world.

- Highly efficient RISC and DSP integration helps to reduce application costs
- Excellent RISC and DSP performance of 220MIPS and up to 880MOPS
- Most necessary interface options
- Powersaving features and efficient realization guarantee a highly energyefficient chip
- Easy programming of RISC and DSP

Targeted Applications (General Purpose Microcontroller)

- Cost sensitive network-enabling and embedded web servers
- Remote Service Applications
- Communication infrastructure
- Data and Voice over IP (VoIP)
- Residential Gateways
- Industrial Automation, Control and Robotics
- Security Applications
- ... and many more

Key Data

- TFBGA Package
- Core-Voltage: 1.8V
- I/O Voltage Supply: 3.3V
- Industrial Temperature Range
- Manufactured in a 0.18µm Process

High Performance Hyperstone Processor Architecture

- Hyperstone 32-Bit RISC/DSP processor core (E1 - 32XSR)
- Up to 220MHz, dynamic frequency scaling delivering 220 MIPS and up to 880 MOPS
- Latency based parallelism of RISC ALU, Load/Store and DSP
- Comprehensive DSP Library
- ... and many more

Key Features

- 4 internal busses with multi channel DMA controller
- Peripheral Bus with variable frequency, to reduce power consumption
- Multi-master/multi-slave high frequency System Bus
- Ethernet Bus
- Co-processor Bus
- Direct Memory Access Controller with 6 independently configurable channels
- Time Processor Unit (TPU) programmable timer with one 32-bit counter and two 16-bit counters
- Efficient Power Management
- Management Unit including reset manager, clock manager and configuration unit
- Interrupt Controller
- DCT Co-processor for 8x8 DCT and IDCT
- Clock Synchronization Core according to IEEE 1588 standard
- YUV interface CCIR656-compliant video input interface reassembling raw video data out of a CCIR656 YCrCb 4:2:2 8-bit data stream
- Real Time Clock
- Watchdog


Versatile Interfaces

- 10/100 Mbit/s Ethernet MAC with MII supporting real-time standard (IEEE 1588), also fully compliant with Ethernet standards such as IEEE 802.3, 802.3u, and ANSI X3.263-1995 (FDDI-TP-PMD)
- Mini PCI interface, 32-bit/66MHz
- Programmable serial Communication Engine 16 I/O lines or software controlled general purpose I/Os, providing eight communication channels including UART, IrDA, I2C Master and Slave, Synchronous Communication and interface options to various devices such as A/D or D/A converters, codecs and serial memories
- MPI interface for powerline communication
- Controller Area Network (CAN) interface compatible to CAN 2.0, extended format and Philips SJA1000; featuring non-destructive bit-wise arbitration (CSMA/CA), message based addressing/filtering, broadcast communication, and 1Mbit/sec operation.

Internal Memory-System

- 16 kByte RAM, two 2 kByte instruction/data caches
- 8 kByte Mask ROM (Boot loader)
- 64 kByte SRAM
- 4 kByte shared DPR (Ethernet)
- 32-Bit data and address bus

hyNet 32S Block Diagram

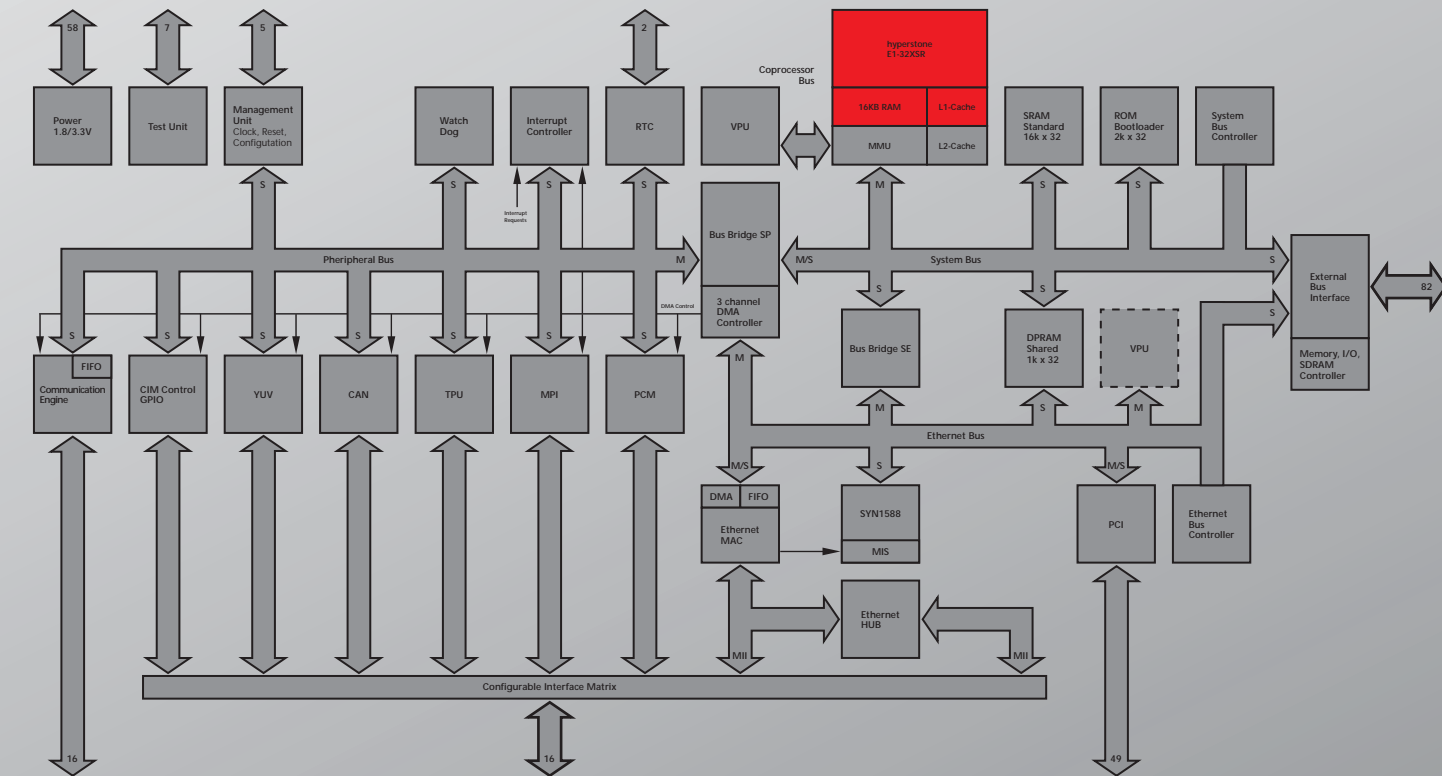

Development Software and Hardware Support

All necessary development software and hardware is available from Hyperstone. Available options include an inexpensive starter-kit option as well as the Hyperstone real-time kernel (hyRTK), DSP software library (hyDSP), macro assembler, C-compiler, debugger, file-linker, library manager, and profiler.



hyperstone[®] AG
hyNet 32S
0405FK1HH
S27124.1

IEEE 1588
EtherNet/IP
ETHERNET POWERLINK
PROFINET
HYNETOS
Linux

hyNet 32S

RISC/DSP Microprocessor



Hyperstone AG
Line-Eid-Strasse 3
78467 Konstanz
Germany
Phone: +49 7531 98030
Fax: +49 7531 51725
Email: info@hyperstone.de

Hyperstone Inc. - USA
4800 Bethania Station Road
Winston-Salem, NC 27105
USA
Phone: +1 336 744 0724
Fax: +1 336 744 5054
Email: us.sales@hyperstone.com

Hyperstone Taiwan
11F, No. 183, Sec.2, TidingBlvd.
Neihu District, Taipei City 114
Taiwan, R.O.C.
Phone: +886 2 8751 0203
Fax: +886 2 8797 2321
Email: taiwan@hyperstone.com

www.hyperstone.com

Content is subject to change without prior notice. hyNet, hyNet 32XS, hyRTK and hyDSP are trademarks of Hyperstone AG. Other brand, product or company names are property of the respective holder. Warranties, implied or expressed as well as liabilities for any damage resulting from using provided information in this document are excluded until part of a separate written contract.

HS-Mkt-AM-06-01-01



hyNet 32S

RISC/DSP Microprocessor



Benefit from both, the unique, highly efficient and easy to program Hyperstone RISC / DSP architecture combined with most necessary interfaces and features required for network enabling and communications within the embedded applications world.

- Highly efficient RISC and DSP integration helps to reduce application costs
- Excellent RISC and DSP performance of 220MIPS and up to 880MOPS
- Most necessary interface options
- Powersaving features and efficient realization guarantee a highly energyefficient chip
- Easy programming of RISC and DSP

Targeted Applications (General Purpose Microcontroller)

- Cost sensitive network-enabling and embedded web servers
- Remote Service Applications
- Communication infrastructure
- Data and Voice over IP (VoIP)
- Residential Gateways
- Industrial Automation, Control and Robotics
- Security Applications
- ... and many more

Key Data

- TFBGA Package
- Core-Voltage: 1.8V
- I/O Voltage Supply: 3.3V
- Industrial Temperature Range
- Manufactured in a 0.18µm Process

High Performance Hyperstone Processor Architecture

- Hyperstone 32-Bit RISC/DSP processor core (E1 - 32XSR)
- Up to 220MHz, dynamic frequency scaling delivering 220 MIPS and up to 880 MOPS
- Latency based parallelism of RISC ALU, Load/Store and DSP
- Comprehensive DSP Library
- ... and many more

Key Features

- 4 internal busses with multi channel DMA controller
- Peripheral Bus with variable frequency, to reduce power consumption
- Multi-master/multi-slave high frequency System Bus
- Ethernet Bus
- Co-processor Bus
- Direct Memory Access Controller with 6 independently configurable channels
- Time Processor Unit (TPU) programmable timer with one 32-bit counter and two 16-bit counters
- Efficient Power Management
- Management Unit including reset manager, clock manager and configuration unit
- Interrupt Controller
- DCT Co-processor for 8x8 DCT and IDCT
- Clock Synchronization Core according to IEEE 1588 standard
- YUV interface CCIR656-compliant video input interface reassembling raw video data out of a CCIR656 YCrCb 4:2:2 8-bit data stream
- Real Time Clock
- Watchdog


Versatile Interfaces

- 10/100 Mbit/s Ethernet MAC with MII supporting real-time standard (IEEE 1588), also fully compliant with Ethernet standards such as IEEE 802.3, 802.3u, and ANSI X3.263-1995 (FDDI-TP-PMD)
- Mini PCI interface, 32-bit/66MHz
- Programmable serial Communication Engine 16 I/O lines or software controlled general purpose I/Os, providing eight communication channels including UART, IrDA, I2C Master and Slave, Synchronous Communication and interface options to various devices such as A/D or D/A converters, codecs and serial memories
- MPI interface for powerline communication
- Controller Area Network (CAN) interface compatible to CAN 2.0, extended format and Philips SJA1000; featuring non-destructive bit-wise arbitration (CSMA/CA), message based addressing/filtering, broadcast communication, and 1Mbit/sec operation.

Internal Memory-System

- 16 kByte RAM, two 2 kByte instruction/data caches
- 8 kByte Mask ROM (Boot loader)
- 64 kByte SRAM
- 4 kByte shared DPR (Ethernet)
- 32-Bit data and address bus

hyNet 32S Block Diagram

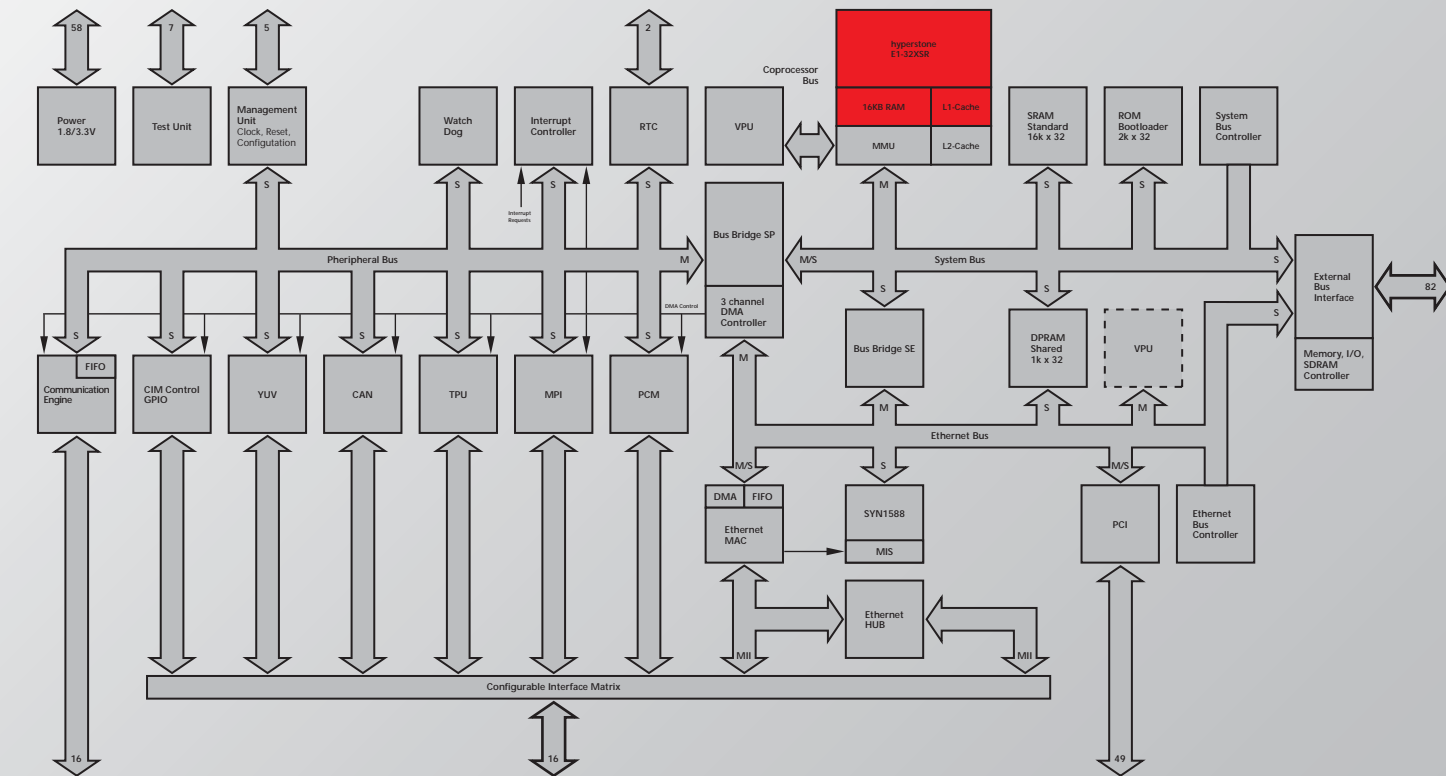

Development Software and Hardware Support

All necessary development software and hardware is available from Hyperstone. Available options include an inexpensive starter-kit option as well as the Hyperstone real-time kernel (hyRTK), DSP software library (hyDSP), macro assembler, C-compiler, debugger, file-linker, library manager, and profiler.